

UNIVERSAL ISOLATED DIN RAIL TRANSMITTER TDU301-I



The Tekon Electronics Universal Temperature Transmitters are specifically designed to meet the most rigorous requirements of operation in the industrial process environments.

TDU301 is an ultra-flexible universal temperature transmitter which accepts the most commonly used temperature sensors (resistance thermometers with 2, 3 or 4-wire system and thermocouples) and generates a linear 4 to 20mA current signal with high stability as output.

Dimensions 6,2 x 96,4 x 106,1 mm

Weight Approx. 55g

Material PA RAL 7035

Protection Index IP40 (enclosure) / IP20 (terminals)

KEY FEATURES

PT100, PT500 AND PT1000 INPUT SENSOR

THERMOCOUPLE SENSOR INPUT

J, K, N, R, S, T

1,5 kV AC GALVANIC ISOLATION

4 TO 20 mA ANALOG OUTPUT

2 STATUS LEDS

HIGH MEASUREMENT ACCURACY

HIGH EMC PERFORMANCE

NAMUR NE 43 FAULT COMPLIANT

CONFIGURABLE OVER PC

TEKON CONFIGURATOR SOFTWARE

DS_DINR_TDU301-I-E01B

TECHNICAL SPECIFICATIONS

**INPUT
RESISTANCE THERMOMETER (RTD)**

Measured variable	Temperature
Sensor type	PT100, PT500, PT1000
Connection	1 Resistance thermometer (RTD) in 2, 3 and 4-wire system
Units	°C
Sensor current	200 µA
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	Always active (cannot be disabled)
Measuring range	Configurable (see "Digital measuring accuracy" table)
Minimum measured span	50°C
Characteristic curve	Temperature-linear
Cable resistance per wire (max.)	50 Ω
Effect of sensor cable resistance	< 0,0015 Ω / Ω - 3 wires < 0,0005 Ω / Ω - 4 wires

**INPUT
THERMOCOUPLE (TC)**

Units	°C
Connection	1 Thermocouple (TC)
Sensor current diagnostic	<11 nA
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	Not available
Cold junction compensation (CJC)	Integrated resistance thermometer
Measuring range	Configurable (see "Digital measuring accuracy" table)
Minimum measured span	50°C
Characteristic curve	Temperature-linear

USB

Type	Micro USB
Input voltage	5 V (*)

(*) If the external power and the micro USB are connected at the same time, the analog output loop can be inhibited. If that happens remove the power cord from the laptop and use it only with batteries.

OUTPUT

Output signal	4 to 20 mA
Power supply (Uaux)	12 to 24V DC
Max. load	$(U_{aux} - 12) / 0,021$ A
Error signal (e.g. following sensor fault) (conforming to NAMUR NE43)	Software configurable 3,2mA or 21mA
Sample cycle	< 200ms
Protection	Against reversed polarity Surge protection

COMMON SPECIFICATIONS

Isolation voltage (test operation)	1,5 kV AC 48 V AC
--------------------------------------	---------------------

Internal power dissipation	40 mW to 0,5 W
Voltage drop	12 VDC
Effect of supply voltage variation	< 0,003% of span/ V DC
Response time 90%	< 1s
Power-up time (TC)	< 600ms
Power-up time (RTD)	< 1s

MEASUREMENT ACCURACY

Reference conditions	
Auxiliary power	24V DC \pm 1%
Ambient temperature	23°C
Warm-up time	2 min
Error in the analog output (digital/analog converter)	$\leq \pm 0,01\%$ of span
Digital measuring errors	See table "Digital measuring accuracy" table
Error due to internal cold junction	< $\pm 0,35$ °C
Influence of ambient temperature	
on RTD measurement	< $\pm 0,0042$ °C / °C
on thermocouple	Thermocouples J, K, N: $\leq \pm 0,0008$ °C / °C Thermocouples R, S, T: $\leq \pm 0,0012$ °C / °C
on analog output	< $\pm 0,002\%$ of span / °C
EMC - immunity influence (IEC 61326-1)	< $\pm 0,0891\%$ of span
Extended EMC immunity (NAMUR NE 21, A criterion, burst)	< $\pm 0,63\%$ of span

OPERATING ENVIRONMENT

Ambient temperature range	-40 to 80°C
Storage temperature range	-40 to 80°C
Relative humidity	$\leq 95\%$, without condensation

FACTORY DEFAULT SETTINGS

Sensor	PT100 with 3-wire circuit
Measuring range	-200°C to 850°C
Temperature Format	Celsius [°C]
Fault current	3,2 mA
Current offset	0 μ A

CASING

Material	PA RAL 7035
Weight	Approx. 55g
Dimensions	See "Dimensional drawings"
Cross section	2.5 mm ²
Protection type	IP40 (enclosure) / IP20 (terminals)

CERTIFICATIONS AND APPROVALS

EN 61326-1- Class B - Industrial Requirements

IEC 61000-4-2

IEC 61000-4-3

IEC 61000-4-4

IEC 61000-4-5

IEC 61000-4-6

DIGITAL MEASURING ACCURACY

RESISTANCE THERMOMETER (RTD)


SENSOR	RANGE °C	DIGITAL ACCURACY °C
PT100	-200 to 850	< ± 0,2
PT500	-200 to 850	< ± 0,2
PT1000	-200 to 850	< ± 0,2

THERMOCOUPLES (TC)

SENSOR	RANGE °C	DIGITAL ACCURACY °C
J	-210 to 1200	< ± 0,5
K	-270 to 1372	< ± 0,5
N	-270 to 1270	< ± 0,5
R	-50 to 1768	< ± 1
S	-50 to 1768	< ± 1
T	-270 to 400	< ± 0,5


TECHNICAL DRAWINGS AND INFORMATION

DIMENSIONAL DRAWINGS & INSTALLATION DIAGRAM

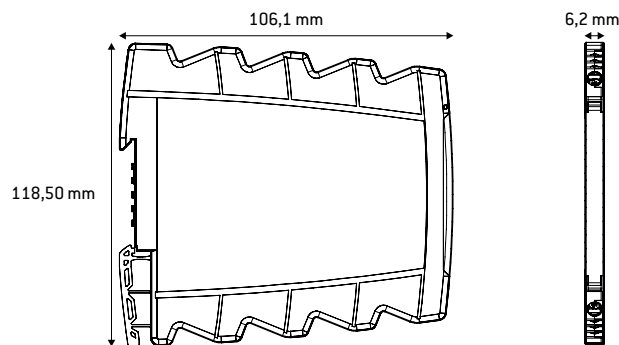


ELECTRICAL CONNECTIONS


POWER SUPPLY

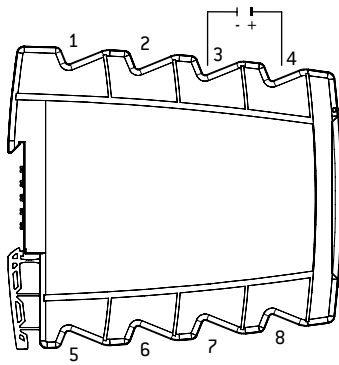




USB




THERMOCOUPLE

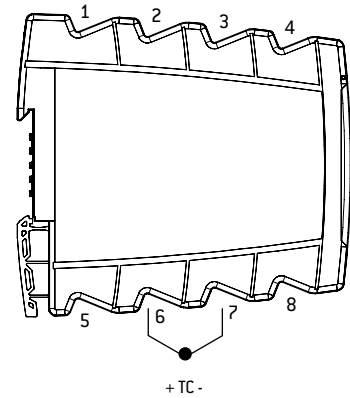

RESISTANCE THERMOMETER

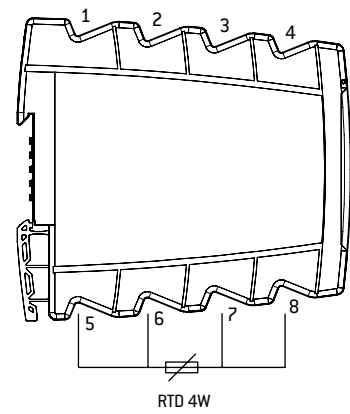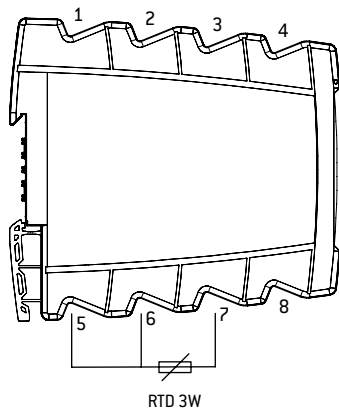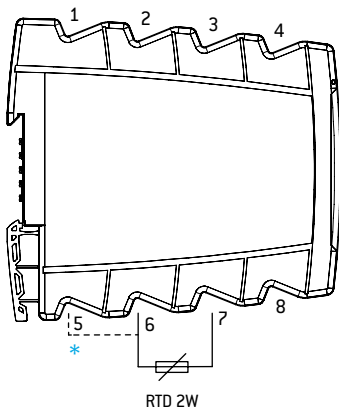


STATUS LED

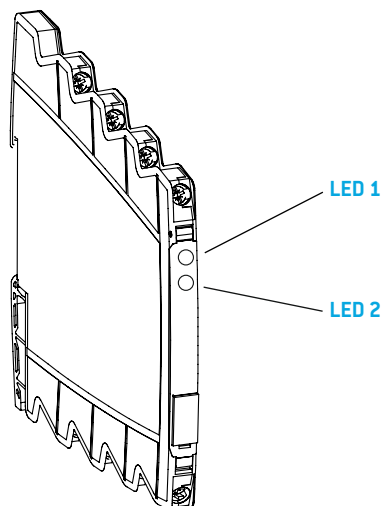

LED 1 (RED)	LED 2 (BLUE)	
OFF	BLINK	No sensor error Configuration mode
FLASH	BLINK	Sensor error Configuration mode
BLINK	BLINK	Temperature out of range Configuration mode
OFF	ON	No sensor error Normal mode
FLASH	ON	Sensor error Normal mode
BLINK	ON	Temperature out of range Normal mode

BLOCK DIAGRAM

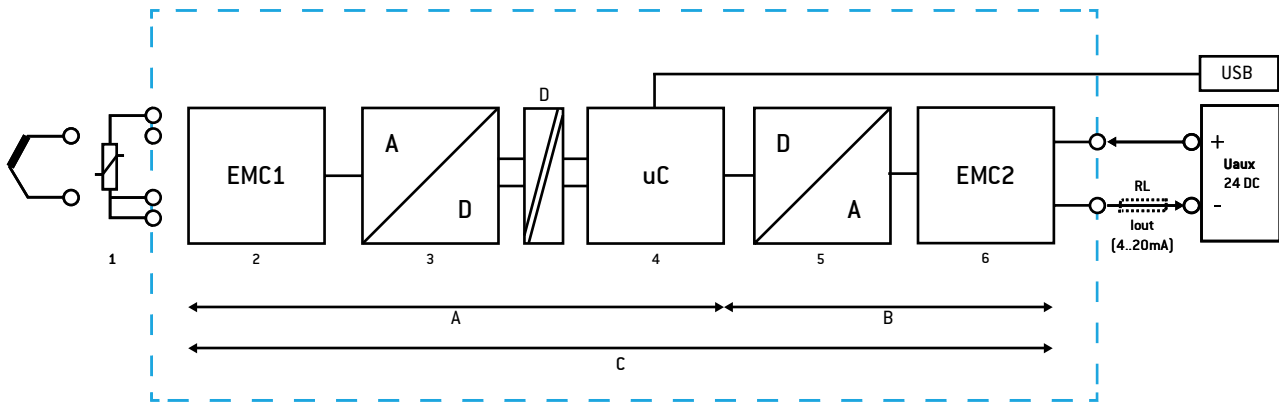

- | | |
|--|--|
| 1 - Sensor (RTD, TC) | RL - Loop load |
| 2 - Sensor input protection module | Uaux - Power supply |
| 3 - Analog-Digital converter (16 Bits) | Iout - Output current |
| 4 - Microcontroller | A - Digital measure accuracy |
| 5 - Digital-Analog converter (16 bits) | B - Digital / Analog conversion accuracy |
| 6 - Output protection module | C - Total measure accuracy |
| | D - Electrical isolation |

*The 2-wire connection requires an electrical connection between screw 5 and screw 6

REVISION HISTORY


VERSION

E01B Inclusion of technical information about USB plug.

TEKON ELECTRONICS
a brand of Bresimar Automação S.A.

Avenida Europa, 460
Quinta do Simão
3800-230 Aveiro
PORTUGAL

P.: +351 234 303 320
M.: +351 933 033 250
E.: sales@tekonelectronics.com



Cofinanciado por:



UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional