

WIRELESS TRANSMITTER DUOS inAIR



Tekon Wireless Transmitter DUOS inAirQuality is an accurate solution for measurement and monitoring of temperature, relative humidity, CO₂ and barometric pressure for demanding applications. Taking advantage from all the features of DUOS product family, it's the perfect solution for air quality monitoring, agriculture, buildings and other applications.

This device combines a built-in sensor that allows the monitoring of a range of relevant indicators for indoor air quality (IAQ) that can compromise humans' cognitive performance and well-being.

Product References

	White
868MHz	PA210310410
915MHz	PA210310420

KEY FEATURES

-40 °C TO 60°C

TEMPERATURE SENSOR MEASUREMENT RANGE

400 TO 5000 PPM

CO₂ SENSOR MEASUREMENT RANGE

0% TO 100%

HUMIDITY SENSOR MEASUREMENT RANGE

300 TO 1100 MBAR

BAROMETRIC PRESSURE SENSOR MEASUREMENT RANGE

DIGITAL INPUT

WIRELESS LINK INDICATION (RSSI)

AUTO DISCOVERY OF THE BEST WIRELESS LINK

IP65 PROTECTION

DS-DUOS_INAIR_E02A

TECHNICAL SPECIFICATIONS

RADIO SPECIFICATIONS	868MHZ	915MHZ
Range ¹	Up to 4 Km LoS	
Minimum communication distance	3 m @ 27 dBm (500mW)	
Radio transmit power ²	0 to 27 dBm	8 to 27 dBm
Radio receiver sensitivity ²	-97 to -110 dBm	
Frequency band ²	868 to 869 MHz	902 to 928 MHz ⁵
Radio channels	16	50 ⁶
Radio transmission rate ²	1,2 to 76,8 kbit/s	
Modulation	GFSK	2-FSK
Encryption method	AES 128 (Advanced Encryption Standard)	

WIRELESS NETWORK

Maximum devices	55
Maximum hops	13
Communication period	5 to 43200 seconds (configurable)

TEMPERATURE MEASUREMENT

Range	-40 to 60 °C
Resolution	0,1 °C
Accuracy	Typical: ± 0,25 °C / Maximum: ± 0,5 °C
Sensor type	I2C digital sensor
Response time	1 second

HUMIDITY MEASUREMENT *

Range	0 to 100 %
Resolution	0,01 %
Full precision range	10 to 90 % [0..60°C]
Response time (t ₆₃) at 25°C	8 seconds
Accuracy at 25°C	± 3%
Sensor type	I2C digital sensor

* Software versions equal to or lower than 1.1.0 and firmware versions equal to or lower than 1.0.0.

HUMIDITY MEASUREMENT *

Range	0 to 100 %
Resolution	0,01 %
Full precision range	20 to 80 % [0..60°C]
Response time (t ₆₃) at 25°C	8 seconds
Accuracy at 25°C	± 5% ⁷
Sensor type	I2C digital sensor

* Software versions equal to or higher than 2.0.0 and firmware versions equal to or higher than 3.0.0.

CO2 MEASUREMENT *

Range	0 to 5000 ppm
Accuracy (at 25°C and 1013 mbar)	0 ... 5000 ppm \pm (50 ppm + 3% of measured value)
Sampling time	5 to 3600 seconds (configurable)
Response time (t_{63})	75 seconds
Temperature dependency	$\pm (1 + \text{CO2 concentration [ppm]} / 1000) \text{ ppm } / ^\circ\text{C}$ (-20 to 45 °C)
Sensor type	I2C digital sensor

* Software versions equal to or lower than 1.1.0 and firmware versions equal to or lower than 1.0.0.

CO2 MEASUREMENT *

Range	400 to 5000 ppm
Accuracy (at 25°C, 50% RH and 1013 mbar)	400 - 1000 ppm \pm (50 ppm + 2.5% of reading) 1001 ... 2000 ppm \pm (50 ppm + 3% of reading) 2001 ... 5000 ppm \pm (40 ppm + 5% of reading) ⁸
Sampling time	10 to 3600 seconds (configurable)
Response time (t_{63})	60 seconds
Sensor type	I2C digital sensor

* Software versions equal to or higher than 2.0.0 and firmware versions equal to or higher than 3.0.0.

BAROMETRIC PRESSURE MEASUREMENT *

Range	700 to 1100 mbar
Accuracy (at 25°C)	± 2 mbar (20 to 80% RH)
Temperature dependency	$\pm 0,015$ mbar/K
Sensor type	I2C digital sensor

* Software versions equal to or lower than 1.1.0 and firmware versions equal to or lower than 1.0.0.

BAROMETRIC PRESSURE MEASUREMENT *

Range	300 to 1100 mbar
Accuracy (at 25°C)	± 2 mbar (0 to 65°C and 20 to 80% RH)
Temperature dependency	$\pm 0,015$ mbar/K, equivalent to 12.6 cm/K (25 to 40°C, 900 mbar) ⁹
Sensor type	I2C digital sensor

* Software versions equal to or higher than 2.0.0 and firmware versions equal to or higher than 3.0.0.

DIGITAL INPUT - ELECTRICAL AND TIME FEATURES

Contact type	Dry contact
Standby state	Open / OFF
Current consumption	DI ON: 28uA / DI OFF: 0uA
Communication time after DI activation	< 1,1 seconds
DI debounce time	60ms
Edge trigger	Open -> Close
DI event buffer	8

POWER SUPPLY

3x1,5 V AA lithium/alkaline/Ni-MH batteries ³
External power supply with 5 VDC \pm 5%
Peak current draw < 100 mA ²
Supply voltage measurement accuracy \pm 100 mV
Sleep mode current consumption < 30 μ A

OPERATING ENVIRONMENT *

Temperature range	-40 °C to 60° C
Humidity	95% maximum relative humidity (non-condensing)

* Software versions equal to or lower than 1.1.0 and firmware versions equal to or lower than 1.0.0.

OPERATING ENVIRONMENT *

Temperature range	-10 °C to 60° C
Humidity ¹⁰	95% maximum relative humidity (non-condensing) ¹¹

* Software versions equal to or higher than 2.0.0 and firmware versions equal to or higher than 3.0.0.

INTERFACE

2 blue LED (LED 1 and LED 2) for wireless network address identification and general operation status
1 red LED (LED 4) and 1 green LED (LED 3) for wireless network operation status
1 magnetic reed switch for system reset
1 M8 female socket with 5 poles for device configuration through host computer

FACTORY DEFAULT SETTINGS	868MHZ	915MHZ
Frequency	869,525 MHz	915,000 MHz
Radio transmit power	27 dBm	
Radio transmission rate	76,8 kbit/s	
Wireless channel	13	26
Transmitter ID	1	
Communication period	10 seconds	
Configuration time window at startup	10 seconds	
Reconnection period	30 minutes	
Wireless network ID	16777217	

CASING

Dimensions	162 x 88,5 x 25 mm
Weight	100 g
Material	ABS UL94HB
Protection index	IP65

CERTIFICATIONS AND APPROVALS

EN 301 489-1 V2.2.1

¹ Range depends on the RF propagation environment and Line of Sight (LoS). Always verify your wireless network's range by performing a Site Survey.
² Dependent on radio channel selection.
³ Batteries not included.
⁴ Considering a communication period of 10 minutes, and maximum transmit power (27dBm) at 25 °C.
⁵ In some countries, the frequency band admitted is not so extended as the default range.
⁶ The radio frequencies admitted in Australia are available from channel 26 to channel 50.
⁷ At 20-80% RH, 25°C.
⁸ to CO2 concentrations smaller than 400 ppm can affect the accuracy of the sensor.
⁹ When changing temperature from 25 to 40°C at constant pressure/altitude, the measured pressure/altitude will change by (15 x 0.015 mbar/K).
¹⁰ If the equipment is used in condensing environments, it is recommended to operate the sensor continuously in the high performance mode. Please, let us know if this is your case. Exposure to volatile organic compounds at high concentration and long exposure time is critical as this could result in pollution of the built-in humidity sensor resulting in offset of RH readings. Exposure to acids or bases may be critical too. Etching substances such as H2O2, NH3, etc. at high concentrations are critical to the sensor as well. Such application needs to be carefully tested and qualified.
¹¹ Accuracy can be reduced at relative humidity levels lower than 20% and higher than 80%


BATTERIES

RECOMMENDED BATTERIES

BRAND	ENERGIZER	PANASONIC	DURACELL	DURACELL
Model	Ultimate Lithium L91	Alkaline Power	MN1500	DX1500H
TME Part Number	BAT-FR6/EGL-B4	BAT-LR06/P-B4	BAT-LR6/DR-B12	ACCU-R6/2500/DR
Classification	Lithium	Alkaline	Alkaline	Rechargeable
Chemical System	Li/FeS ₂	Zn/MnO ₂	Zn/MnO ₂	Ni-MH
Nominal Voltage	1,5 V	1,5 V	1,5 V	1,2 V
Type	AA	AA	AA	AA
Operating Temperature	-40°C to 60°C	-20°C to 54°C	-20°C to 54°C	-10°C to 50°C


VOLTAGE THRESHOLD (VDC)	INTERNAL TEMP. ≥ -10°	INTERNAL TEMP. < -10°
Critical battery	3 V	2,5 V

PERFORMANCE TESTS *

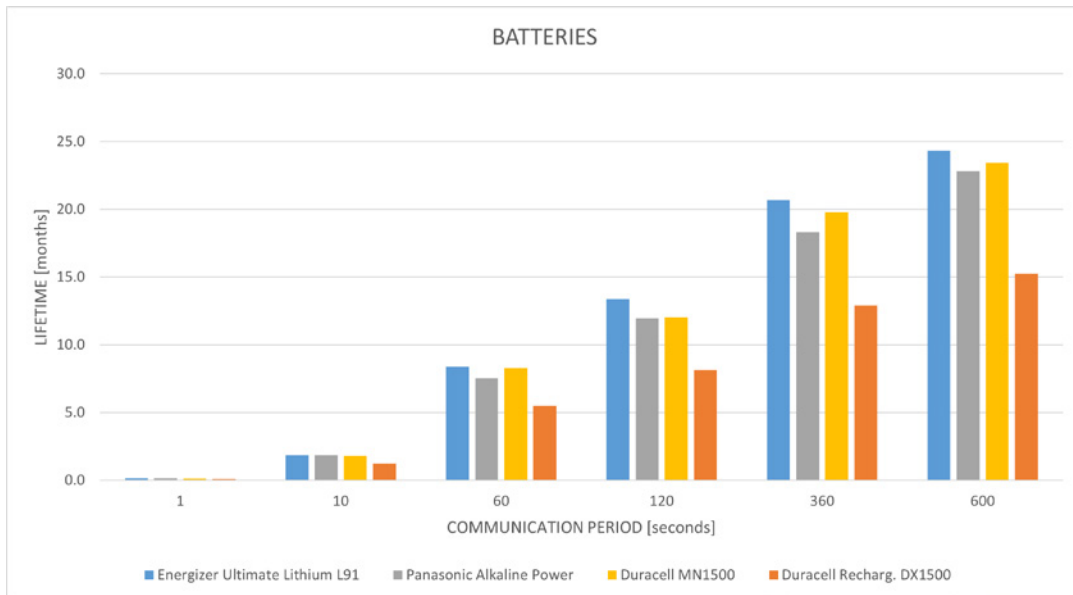

* Software versions equal to or lower than 1.1.0 and firmware versions equal to or lower than 1.0.0.

PERFORMANCE TESTS *

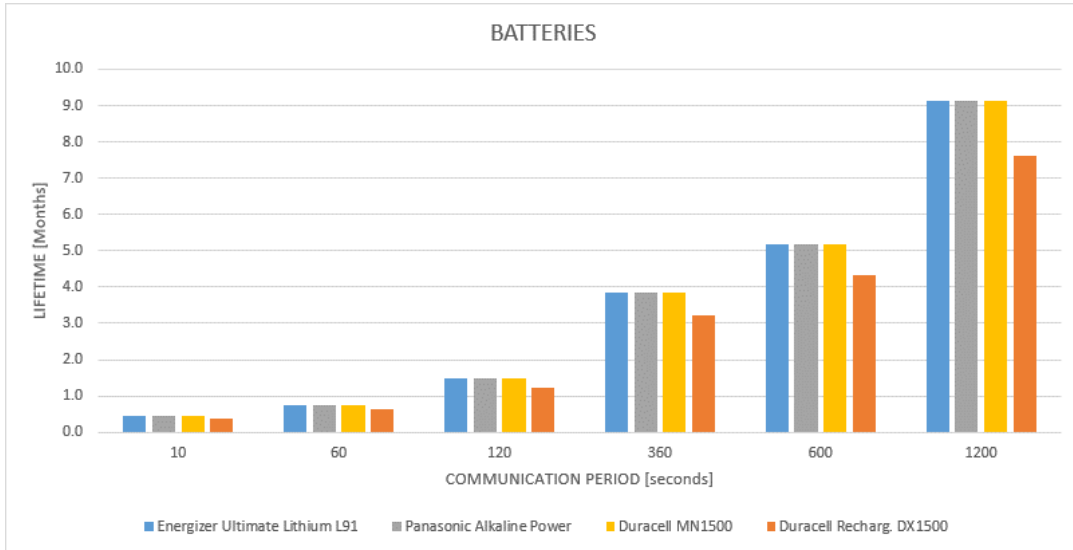


* Software versions equal to or higher than 2.0.0 and firmware versions equal to or higher than 3.0.0.

DIGITAL INPUT

TRANSMITTER DI OPERATION


- Transmission triggered by C.P.
CP - Communication Period = 10 seg
- DI - Digital Input State
- TX:DI - Transmission triggered by DI

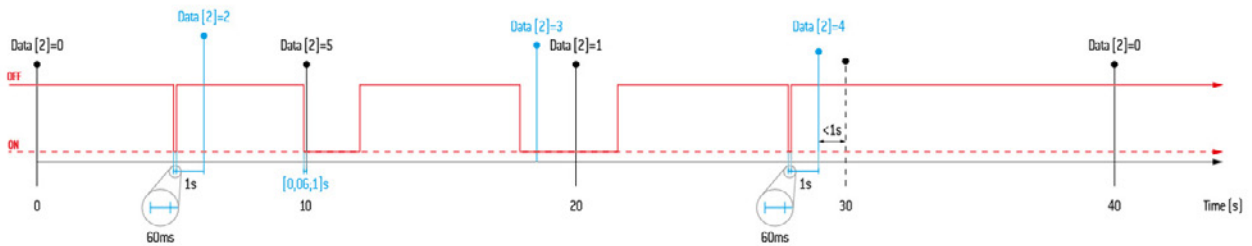

DI STATE / AWAKENED BY	Time	DI	DI+Time
OFF	0	2	4
ON	1	3	5

Note: If Communication Period is equal to 1 second, possible values are: 0, 1, 4 and 5.

CONNECTION DIAGRAM

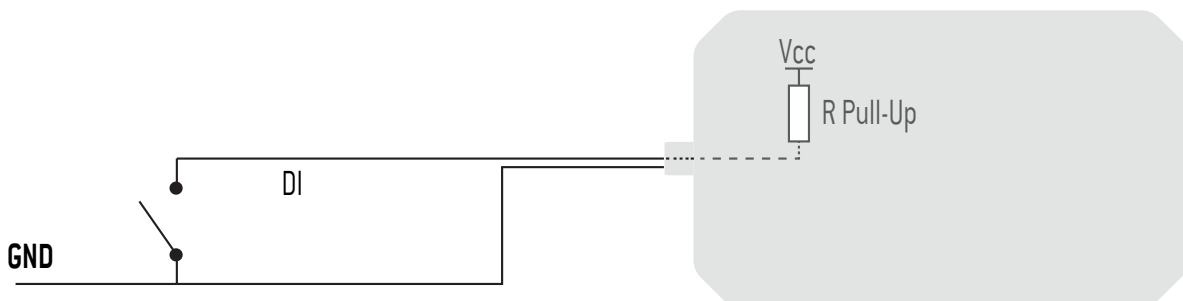

CALIBRATION SETTINGS


Linear Calibration (y=mx+b)*	m	b
CO ₂	1 (default)	0 (default)
Temperature	1 (default)	0 (default)
Humidity	1 (default)	0 (default)
Barometric Pressure	1 (default)	0 (default)

* Software configurable values

RSSI LEVELS

SIGNAL (DBM)	QUALITY
0 to -50	Excellent
-51 to -60	Good
-61 to -70	Acceptable
-71 to -100	Poor

MAGNETIC SWITCH

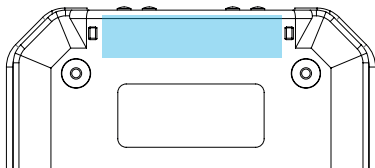

The DUOS Wireless Transmitters have a magnetic switch that allows to reset the devices.


Operation Mode:


Slide a magnet in the area marked in the image. All LED's will be active and the transmitter will be restarted.

TECHNICAL DRAWINGS

DIMENSIONAL DRAWINGS AND INTERFACE DESIGN

POWER SUPPLY AND COMMUNICATIONS CONNECTOR

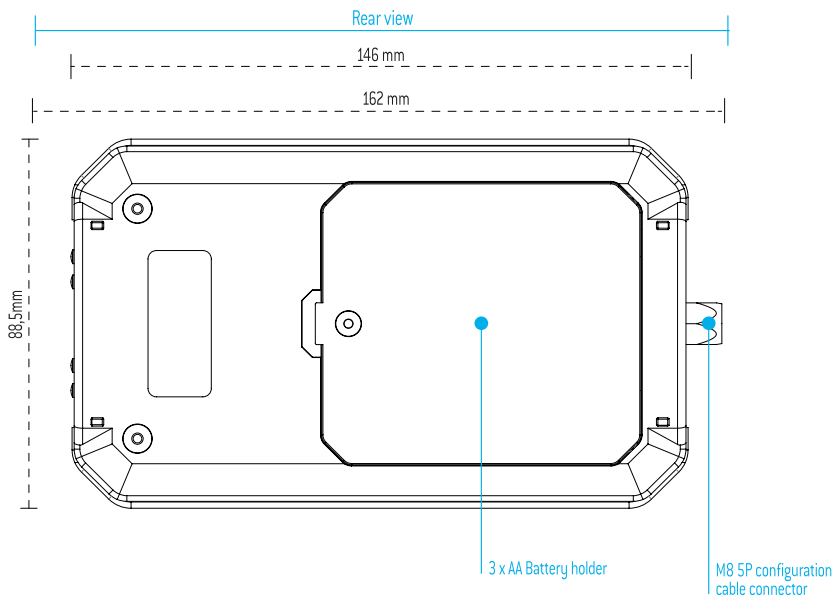

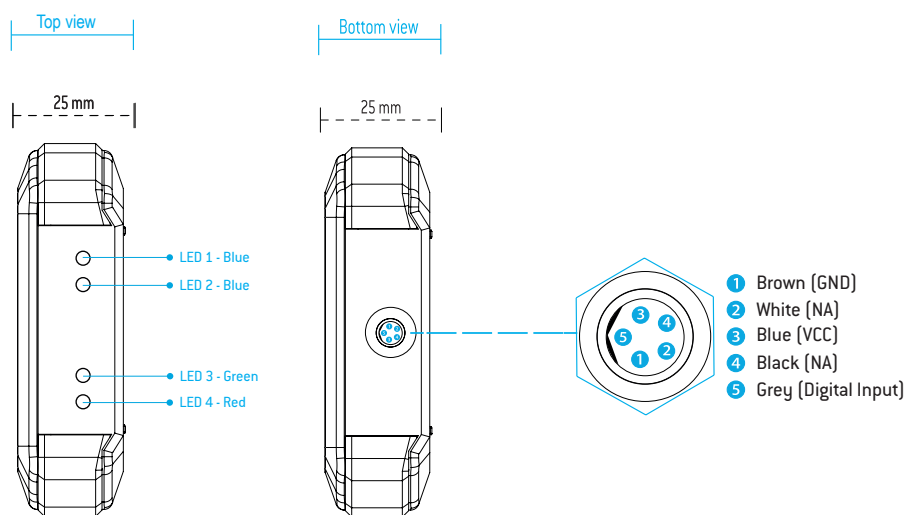

ACCESSORIES



DUOS EXTERNAL POWER CABLE

REF.: PA160410008

DUOS Transmitter external power supply cable.



DUOS DI+TEMP EXTERNAL CABLE

REF.: PA160410009

DUOS DI+TEMP Digital Input cable.



DUOS TRANSMITTER SARC

REF.: PA160410005

Cable used to configure DUOS Transmitter using Tekon Configuration software.



DUOS POWER SUPPLY 230V AC / 5V DC

REF.: PA160413610

230V/50Hz Power supply cable to be used with the wireless gateway and repeater DUOS.

REVISION HISTORY

VERSION

VERSION	
E02A	<p>Inclusion of Reconnection Period on "Factory Default Settings Table";</p> <p>Addition of new "CO2 Measurement" table;</p> <p>Addition of new "Humidity Measurement" table"</p> <p>Changing of the product image;</p> <p>Addition of new "Barometric Pressure Measurement" table;</p> <p>Addition of new "Operating Environment" table;</p> <p>Addition of new "Performance Tests" graphic.</p>

© BRESIMAR AUTOMAÇÃO, S.A.

All rights reserved.


The contents of this document (texts, images, brands, corporate image, trade name, designs, methodological and product descriptions, among others), as well as its structure and design, are owned by Bresimar Automação, SA [herein in referred to as Bresimar] or, it has legitimacy for its use, being strictly prohibited the modification, exploitation, reproduction, communication to third parties or distribution of all or part of the contents of this document, without the prior express written consent of Bresimar .

Bresimar will not be liable for any claim, loss or damages resulting from or arising from a cause over which Bresimar has no control, whether by acts or omissions, breach of contract or non-compliance with applicable laws by the Supplier , as well as incidents caused by the client's systems.

TEKON ELECTRONICS
a brand of Bresimar Automação S.A.

Avenida Europa, 460
Quinta do Simão
3800-230 Aveiro
PORTUGAL

P.: +351 234 303 320
M.: +351 933 033 250
E.: sales@tekonelectronics.com



Cofinanciado por:



UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional